**Vickers**<sup>®</sup>


## **Check Valves**

**Service Parts Information** 

## **Pilot Operated Check Valve Modules**




DGMPC-3-\*\*\*-(\*\*\*)-20

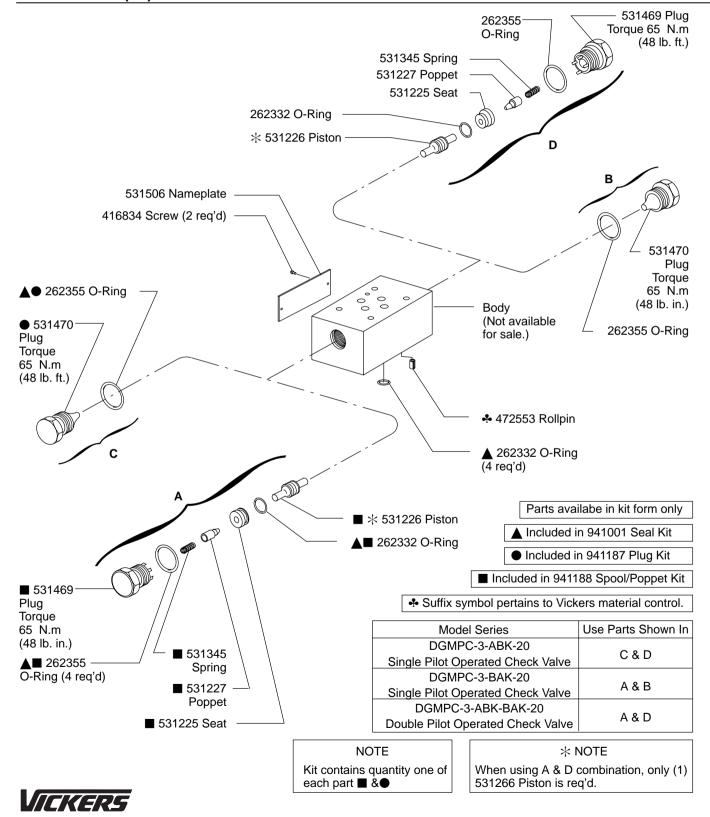

## **Model Code**

DGM PC - 3 - * * * - (* * *) - 20		
1 Model Series	5 Pilot Port	8 Pilot Port
DGM - Directional control module subplate mounted	A or B port	A port
	6 Cracking Pressure	<b>9</b> Cracking Pressure
<ul><li><b>Type of Module</b></li><li><b>PC</b> - Pilot operated check</li></ul>	<b>K</b> - 1 bar (14.5 psi)	<b>K</b> - 1 bar (14.5 psi)
	7 Port operated upon	10 Design
3 Interface	B port	
01 - NFPA-D 03 - ISO-4401		
4 Port operated upon		

A or B port

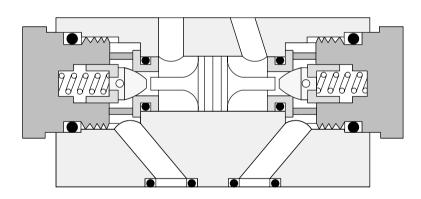

For satisfactory service life of these components, use full flow filtration to provide fluid which meets ISO cleanliness code 20/18/15 or cleaner. Selections from Eaton OFP,OFR and OFRS filter series are recommended.